

CWM 3000 M-F

CONVECTORS

PRODUCT-NO.: 204457

The main features

Freestanding convectors with a high heating output

Mechanical temperature controller

For maximum operational reliability, the integral pendulum switch protects against overturning

Handle and feet with castors

Omnipolar operating selector

Long lasting stainless steel tubular heater with steel fins





Type	CWM 750 M-F	CWM 1000 M-F	CWM 1500 M-F
Part no.	204452	204453	204454

Heating output

Rated heating output P _{nom}	0.75 kW	1.00 kW	1.50 kW
Minimum heating output (standard value) P _{min}	0.00 kW	0.00 kW	0.00 kW
Maximum continuous heating output P _{max,c}	0.75 kW	1.00 kW	1.50 kW

Auxiliary power consumption


H rated heating output e _{lmax}	0.00 kW	0.00 kW	0.00 kW
H minimum heating output e _{lmin}	0.00 kW	0.00 kW	0.00 kW
Dby mode e _{lSB}	0.00 kW	0.00 kW	0.00 kW

Type of heating output/room temperature control

Single stage heating output, no room temperature control	-	-	-
Two or more manual stages, no room temperature control	-	-	-
With mechanic thermostat room temperature control	x	x	x
With electronic room temperature control	-	-	-
Electronic room temperature control plus day timer	-	-	-
Electronic room temperature control plus week timer	-	-	-

Other control options

Room temperature control, with presence detection	-	-	-
Room temperature control, with open window detection	-	-	-
With distance control option	-	-	-
With adaptive start control	-	-	-
With working time limitation	-	-	-
With black bulb sensor	-	-	-

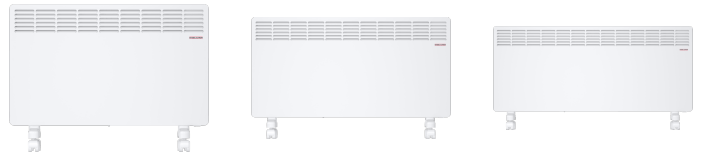

Type	CWM 2000 M-F	CWM 2500 M-F	CWM 3000 M-F
Part no.	204455	204456	204457

Heating output

Rated heating output P _{nom}	2.00 kW	2.50 kW	3.00 kW
Minimum heating output (standard value) P _{min}	0.00 kW	0.00 kW	0.00 kW
Maximum continuous heating output P _{max,c}	2.00 kW	2.50 kW	3.00 kW

Auxiliary power consumption

H rated heating output e _{Hmax}	0.00 kW	0.00 kW	0.00 kW
H minimum heating output e _{Hmin}	0.00 kW	0.00 kW	0.00 kW
Dby mode e _{LSB}	0.00 kW	0.00 kW	0.00 kW

Type of heating output/room temperature control

Single stage heating output, no room temperature control	-	-	-
Two or more manual stages, no room temperature control	-	-	-
With mechanic thermostat room temperature control	x	x	x
With electronic room temperature control	-	-	-
Electronic room temperature control plus day timer	-	-	-
Electronic room temperature control plus week timer	-	-	-

Other control options

Room temperature control, with presence detection	-	-	-
Room temperature control, with open window detection	-	-	-
With distance control option	-	-	-
With adaptive start control	-	-	-
With working time limitation	-	-	-
With black bulb sensor	-	-	-

This product is only suitable for well insulated rooms or for occasional use. Depth and height including feet with castors

Contact information

You have questions? We appreciate to help you:

Call **+49 5531 - 7020**

Write an email to **info@stiebel-eltron.com**

Installation information

Please ask your local power supply utility or a registered electrician to install appliances that are not fully wired, i.e. ready to plug in. The electrician should also be able to assist you with obtaining the agreement of the respective power supply utility required for the appliance installation.